

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
21 October 2004 (21.10.2004)

PCT

(10) International Publication Number
WO 2004/089236 A1

(51) International Patent Classification⁷: **A61C 5/00**

(21) International Application Number:
PCT/IS2004/000002

(22) International Filing Date: 2 February 2004 (02.02.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
6777 10 April 2003 (10.04.2003) IS

(71) Applicant (for all designated States except US): GLOBO-
DENT EHF. [IS/IS]; Hofsbót 4, IS-600 Akureyri (IS).

(72) Inventor; and

(75) Inventor/Applicant (for US only): JONSSON, Egill
[IS/IS]; Stóragærði 17, IS-600 Akureyri (IS).

(74) Agent: A & P ARNASON; Efstaleiti 5, IS-103 Reykjavík
(IS).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), Euro-
pean (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR,
GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:


— of inventorship (Rule 4.17(iv)) for US only

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: INSERTS FOR TOOTH REPAIR



(57) Abstract: A pre-formed tooth insert is provided for insertion in a prepared cavity in a tooth, particularly suitable for cavities accurately prepared to match pre-formed inserts. The insert has at least one surface (1) that remains exposed when the insert is placed in the prepared cavity, a contact surface (5) in continuation of the exposed surface(s) (1), which contact surface comes in contact with the inner surface of the prepared cavity when the insert is placed in the cavity, said contact surface forming substantially vertical edges at the junction with said exposed surface, said edges having an inclination or groove (2) along at least a portion of the edge such that when said insert is placed in said cavity the inclination or groove (2) is located at the junction between the exposed surface and an adjacent outer surface of the tooth, allowing insertion of shapable cement material to form essentially a continuous surface.

2/10/04
1

INSERTS FOR TOOTH REPAIR

FIELD OF INVENTION

5

The present invention is within the field of dentistry and more particularly relating to dental inserts for tooth repair.

10 BACKGROUND AND PRIOR ART

15

Dental decay remains a very common health problem affecting the majority of people around the world. Methods for repairing dental decay often make use of aesthetically non-pleasing materials (mercury amalgam) and dental inserts may have a limited lifetime, shorter than the life span of the patient.

20

Repair of dental decay such as caries may be broadly divided into direct and indirect repair methods. In direct repair methods the caries is removed and the cavity thus created is further cleaned and prepared. Thereafter a filling material, most often dental mercury amalgam or a plastic composite material is inserted into the prepared cavity. The filling, once hardened, is finished to smoothen out any rough edges and essentially create a surface similar in morphology to the original tooth.

25

Indirect repair methods on the other hand, involve the use of prepared inserts, e.g. from ceramic material (porcelain or glass) or gold, that are cast in a mold made after the cavity which has been prepared as described above. The insert, which typically takes a couple of days to manufacture, is fastened in place with dental adhesive cement. Indirect methods have been used for a long time and they provide stronger and longer lasting inserts than can be provided by direct methods. The indirect methods however, are significantly more expensive; both due to the cost of producing the inserts (i.e. equipment needed for such production) and more work needed by the dentist, and at least two visits are required by the patient.

30

Modified indirect methods have been developed based on pre-fabricated inserts such as described in e.g. US 5,567,156, US 5,697,787, DE 19513568, DE 4123237, and DE 3620542. Such inserts however are typically conically shaped (such as e.g. in US 5,567,156, or as manufactured under the trademark Cerana™) or semi-spherically shaped (US 5,697,787). These shapes are limited by methods to readily prepare cavities to match pre-fabricated inserts.

40

Other modified indirect methods include more effective methods to manufacture solid inserts, which allow the dentist himself to manufacture inserts in his own clinic. Equipment for such manufacturing is sold under the trademark Cerec™, and produced by Sirona GmbH in Germany.

5

The use of pre-made inserts such as mentioned above has been severely limited due to the difficulty of preparing cavities of exact size and shape to fit the filling, with currently available prior art methods.

10

The present inventor has developed effective methods and apparatus to prepare exactly shaped cavities to fit pre-fabricated fillings, described in pending patent application WO 02/34154. These methods allow the use of a great variety of pre-fabricated inserts, essentially of any desired shape.

15

Typically, pre-fabricated inserts still need final finishing after insertion and fastening in the prepared cavity, such that the external surfaces match the outer surfaces of the tooth. The outer curvature of teeth can vary significantly, depending both on the position of the tooth in the dental arch, and differences between individuals. Consequently, to obtain a smooth continuous surface of the exposed surface of a pre-fabricated filling and its surrounding outer tooth surfaces, any protruding edges of the insert need to be finished. This can be very difficult to achieve in particular with proximal inserts, where the exposed surface of the insert is on a proximal surface of a tooth, i.e. facing the mesial or distal surface of an adjacent tooth. If, on the other hand, the insert is too "short" (or too shallow), such that its exposed surface is below the adjacent edges of the outer tooth surface, the weakened tooth edges may easily fracture and plaque build-up may increase, followed by secondary caries.

20

The present invention provides novel pre-fabricated inserts that greatly simplify the final finishing of repaired teeth, such that the insert and the adjacent outer surfaces of the tooth form a continuous surface.

25

30 SUMMARY OF INVENTION

35

The present invention provides in a first aspect, a pre-formed tooth insert for insertion in a prepared cavity in a tooth, wherein said insert has at least one surface (1) that remains exposed when the insert is placed in the prepared cavity, said insert has a contact surface (5) in continuation of the exposed surface(s) (1), which contact surface comes in contact with the inner surface of the prepared tooth cavity when the insert is placed in the cavity, said contact surface forming substantially vertical edges (15) at the junction with said exposed surface,

40

and each of said substantially vertical edges having an inclination or groove(2) along at least a portion of the edge such that when said insert is placed in said cavity, the inclination or groove is located at the junction between the exposed surface and an adjacent outer surface of the tooth, allowing insertion of a shapable resin material to form essentially a continuous surface. In useful embodiments the cavity is formed after the insert's outline, i.e. a series of pre-formed insert may be provided, which suit most types repair situations, and a cavity is prepared into which a selected pre-formed insert will fit.

FIGURES

- Figure 1 illustrates an embodiment of an insert of the present invention, 1A: top view, 1B top view of alternative embodiment, 1C: side view, 1D: rear view, 1E: bottom view, 1F: front view, 1G: side view of filling with bottom lip.
- Figure 2 shows alternative embodiments of an insert, 2A: side view, 2B: top view, 2C and 2D: perspective views, 2E: perspective view, showing side grooves (2) and bottom inclination (8).

DETAILED DESCRIPTION

The pre-fabricated inserts of the invention can have sizes and shapes that will fit the most common types and locations of tooth decay. The invention offers the possibility for a dentist to have a stock of pre-fabricated inserts of the most commonly needed shapes and sizes (it is estimated that only 9 different inserts would be suitable and sufficient for the repair of about 90% of caries infections which appear in molars (Ericsson, Yngve et al., *Kariologiska principer*, 1980, Lagerblads AB).

The following terms are used herein to describe the anatomy and geometry of teeth and tooth insert:

- | | | |
|----|-------------------|---|
| 30 | mesial: | toward the center (median) of the dental arch; |
| | distal: | away from the center (median) line of the dental arch; |
| | facial: | toward the cheeks or lips; |
| | lingual: | toward the tongue; |
| | occlusal surface: | the biting surface; the surface that contacts an antagonist tooth in an opposing arch; |
| 35 | cervical surface: | the "side" (facial, lingual or proximal) surfaces of a tooth |
| | proximal surface: | the surface of a tooth that is toward another tooth on the arch; |
| | embrasure: | where curvatures of two teeth in the same arch come in contact, forming a line of contact, which is an occlusal embrasure (contact between curvatures of two occlusal surfaces), lingual embrasure (between two |
| 40 | | |

adjacent lingual surfaces) and buccal embrasure (between two adjacent buccal surfaces).

The pre-formed tooth insert according to the present invention is made of any suitable material that can give strong long-lasting inserts and which material is biologically inert; such as preferably ceramic materials, e.g., porcelain, or mixtures of compressed composites and preheated filling materials or other types of plastic character filling material. The insert may essentially have any desired shape, however, the invention in its presently preferred embodiment is particularly useful for proximal inserts, for reasons discussed above.

The insert has at least one surface (1) which remains exposed when the insert is placed in the prepared cavity, the exposed surface typically comprises a surface selected from a proximal, facial and/or lingual surface of a tooth. Inserts with a proximal exposed surface are particularly useful, and in certain embodiments the insert has a proximal exposed surface that extends by a smooth curvature from a facial to a proximal surface and/or from said proximal surface to a lingual surface, and preferably from the occlusal to a cervical surface of a tooth, forming an intact contact point with an adjacent tooth. In the presently preferred embodiments, the exposed surface extends to the occlusal surface of the tooth, as the methods presently envisioned for preparing the cavity rely on tools that work from the occlusal surface down into the tooth, at an angle substantially along the axis of the tooth.

The insert has at least one contact surface (5) in continuation of the exposed surface(s) (1), which contact surface comes in contact with the inner surface of the prepared tooth cavity when the insert is placed in the cavity, said contact surface forming substantially vertical edges (15) at the junction with at least part of the exposed surface. Each of said substantially vertical edges has an inclination (2) along at least a portion of the edge such that when said insert is placed in said cavity the inclination or groove is located at the junction between the exposed surface and an adjacent outer surface of the tooth. The inclination (2) can be a flat surface intersecting the exposed surface (1) and adjacent contact surface (5), however, the term inclination herein also comprises a groove that be curved or semi-curved, or comprised of two or more inclined surfaces, such as illustrated in Figure 2E. The purpose of the inclination is to allow insertion of a shapable filling material (cement / resin) or composite material in the inclination before or after insertion of the insert, such that the exposed surface of the insert and the adjacent outer surface(s) can form essentially a continuous surface. The cement material may be readily shaped before it hardens, even if the grooves are substantially in an interproximal space. Suitable cement materials include presently available materials such as Heliomolar®, Ketacmolar® or Duxdent® and such.

In particular embodiments, the prepared cavity extends to at least two outer surfaces of the tooth, selected from a proximal (either mesial or distal) surface, a lingual and a facial surface,

in which case the insert has an exposed proximal surface that extends to a facial or lingual exposed surface, as mentioned above where the insert has a contact point touching the adjacent tooth.

- 5 The inclination or grooves (2) mentioned above will generally extend from the front bottom surface (11) of the insert to a height (3) such that the inclinations reach substantially the occlusal embrasure of the tooth being repaired. It should be noted that the portion of the insert which is above the occlusal embrasure is more easily finished with a suitable finishing tool, e.g., a turbine, an ultrasonic bur, or a file; but such tools will not readily reach into the
- 10 interproximal space beneath the occlusal embrasure.

In certain embodiments, the bottom edge (17) of the exposed insert surface also has an inclination (8), that likewise can be filled with a shapable resin.

- 15 The size of the insert according to the invention can vary, depending on the size and location of the cavity that is to be repaired, and the size of the tooth having the cavity. The height of the insert can be anywhere in the range of about 2 to about 15 mm, and preferably from between about 3 to about 10 mm, such as in the range of about 3-7 mm; typically the height corresponds to the distance from the highest occlusal cusp removed from the tooth and
- 20 replaced by a corresponding cusp shape of the insert and down to the bottom surface of the insert, which typically is below the occlusal embrasure but generally above the gingival line.

- The width of the insert is typically in the range of about 1mm to about 10mm, such as in the range of about 2 mm to about 10 mm, or from about 2 mm to about 8 mm. Note that in certain
- 25 embodiments the insert is wedge-shaped as seen from a top-view, such that the outer exposed surface (the proximal surface in case of a proximal insert) is wider than the central portion of the insert, as shown in Figure 2B where the proximal width (27) is wider than the central width (30). Such inserts are suitable where the decay is mostly by the surface (e.g. proximal surface) of the tooth, in this case removal of healthy tooth material from the central
- 30 part of the tooth should be minimized; however, extending the insert to the central part of the tooth will greatly enhance its strength.

- The exposed surface (1) can in certain embodiments be wedge-shaped, as indicated in Figures 2C-E, such that the occlusal edge (16) of the surface is wider than the bottom front
- 35 edge (17), i.e. the substantially vertical edges (15) are slightly tilted.

- The insert preferably has a horizontal curvature on the exposed surface, the degree of the curvature may be indicated by the curvature indent (28) as defined in Figure 2B. Additionally or alternatively, the surface may have a vertical curvature as seen in Figure 2A, which is
- 40 indicated by the top curvature indent (25) and bottom curvature indent (26).

As mentioned above, a simple series of a relatively limited number (e.g., 8-15, and preferably 8-12, such as 10 or 12) of pre-formed inserts can be used for most caries infections. Suitable dimensions of such inserts are set forth in Table 1, where the dimensional parameters are defined with reference to Figure 2 as follows:

5

(20) overall length;

(21) proximal depth (height of the exposed surface);

(27) proximal width (width of the exposed surface);

(30) center part width;

10

(22) occlusal depth;

(32) lift (difference between the proximal depth (21) and occlusal depth (22));

(23) thickness of proximal box;

(24) length of lift area;

(25) top curvature indent;

15

(26) bottom curvature indent;

(28) side curvature indent.

	(27)	(30)	(21)	(22)	(20)	(23)
Insert #1	3,0	1,5	4,0	2,5	4,0	1,5
Insert #2	3,5	2,0	4,0	2,5	4,0	1,5
Insert #3	4,0	2,0	4,5	3,0	4,0	1,5
Insert #4	4,5	2,0	5,0	3,0	4,5	1,5
Insert #5	5,0	2,5	5,5	3,0	5,0	1,5
Insert #6	5,0	2,5	6,5	3,0	5,0	1,5
Insert #7	5,0	2,5	6,5	3,0	5,5	1,5
Insert #8	6,0	3,0	7,0	3,0	5,5	1,5
Insert #9	7,0	3,0	7,0	3,0	6,0	1,5
Insert #10	7,5	6,0	7,0	3,0	6,0	1,5

20

The top part of the insert may be shaped such that it will generally extend beyond and above the upper surface edges of the prepared cavity, as the occlusal surfaces of teeth vary greatly and thus it is difficult to have a pre-formed insert essentially matching the occlusal surface of an individual tooth. Therefore, it is generally necessary to shape the top surface of the insert (by use of, e.g., a stone or bur) to form an occlusal surface matching the occlusal edges of the cavity.

25

It is found to be useful to have a mounting pin (10) extending from the top of the insert to hold the insert while it is being inserted. Said mounting pin may simply be a continuous part of the insert, i.e. from the same material as the insert, or from an alternative material, e.g., a plastic

material which is fixed to the top of the insert. The mounting pin has suitable dimensions for holding with fingers, forceps or a special tool, e.g., a height in the range of about 5-20 mm, and a suitable width, such as of about 2-5 mm. If the insert has a mounting pin (10) this will have to be removed.

5

As shown in Figure 1, the insert has in one embodiment two bottom surfaces (7, 11), a proximal (or facial/lingual) front bottom surface (11) and a higher central bottom surface (7), such that less healthy tooth tissue needs to be removed if the decay is mostly close to the outer surface of the tooth. The insert may however, also have a single bottom surface, this would in particular apply to smaller inserts to maintain sufficient strength of the insert. The central portion (6) of the insert gives the insert added strength and support in the tooth.

10

In one embodiment, the central portion has an anchor part (13) that is wider than the center part (14) of the central portion. The anchor part provides a locking mechanism that further strengthens the insert-tooth binding.

15

In a useful embodiment of the invention the insert is adapted to fit into at least one groove located on a surface of the prepared cavity, which groove lies in a vertical plane (i.e., vertical in relation to the central axis of the tooth). Typically, the insert of such embodiment comprises a lip (4) which fits snugly into the groove, when the insert is placed from above into the prepared cavity. This lip and groove fastening will further secure the position of the insert such as it cannot slide out from the cavity in to the proximal (or facial/lingual) direction. The insert can be adapted to fit into two grooves facing each other on opposite sides of the prepared cavity, as shown in Figure 1, the insert may also (or additionally) be adapted to fit into a groove located on the gingival floor of the cavity. Such a floor groove may extend between two sidewall grooves, as shown in Figure 1F, 1G. In such embodiments, a bottom lip (12) on the insert is shaped to fit in the gingival floor groove. Typically, the bottom groove and matching bottom lip will extend along the bottom surface of the insert, extending between the gingival ends of side grooves in embodiments where the insert has both side lips (4) and a bottom lip (12). The aforementioned grooves and the matching lips will generally lie in vertical plane, such that the insert can be inserted in the prepared cavity by a direct vertical translational movement. Said grooves on the side(s) and bottom of the cavity can be of any suitable shape and width that can be readily prepared with available tools of the art, e.g. such as an apparatus as described in WO 02/34154. Generally, the grooves in the range of about 0.5-5 mm in width, and more typically in the range of about 0.5-2 mm in width, with a depth of similar dimensions, such as in the range of about 0.2-3 mm, including about 0.5-2 mm. Thus, the matching lips will have the same dimensions, such that the insert will fit snugly in the prepared cavity.

20

25

30

35

It should be noted that Figure 1 is meant to illustrate the general functional principles of the inserts of the invention, and does not necessarily represent the most suitable shapes of such inserts. The contact surfaces (5) may e.g. be curved as shown in Figure 1B, the contact lips (4, 12) may have other shapes than shown, etc.

5

In a useful embodiment of the invention, the insert is a proximal insert with two contact surfaces (5) being a facial surface and a lingual surface wherein at least one and preferably both of the facial and lingual sides of the insert diverges from the tooth axis, such that the exposed surface becomes wider at its occlusal (top) end than its gingival (bottom) end, as illustrated by Figure 1D and 1F that show a rear view and front view of an insert with such sloping side surfaces. Suitably, the facial surface and/or lingual surface diverge from the tooth axis by an angle in the range of about 1° to about 10°, and preferably of about 2° to about 7°. If present, side lips (4) in this case will fit into two divergent grooves on the cavity sidewall surfaces that are prepared with angles such that the insert fits snugly in the cavity.

15

In a further aspect, the invention provides a method for repairing a tooth (e.g., removing caries infected tissue and replacing with a tooth insert) by use of the insert of the present invention. The method comprises selecting an insert that is suitable for the size and location of decayed tooth tissue that needs repair; shaping a cavity in the tooth to be repaired into which the selected insert will fit; applying a dental cement or adhesive to the inner surface of said cavity; placing said insert in said cavity; applying a shapable resin material into the inclinations or grooves located on the interfaces between said insert and the prepared cavity; shaping said resin material so as to form a continuous outer surface of said tooth with insert; allowing the resin material to harden; and finishing parts of the insert that extend out of the prepared cavity

25

An apparatus such as referred to above and described in detail in WO 02/34154 is particularly useful to shape a cavity with pre-determined shape and dimensions to match a pre-formed insert of the invention. The insert is subsequently inserted after applying suitable dental cement or dental adhesive such as, e.g., Calibra®, Dual™ Cement-Ivoclar Vivadent, RelyX™ ARC Adhesive Resin Cement 3M ESPE, and such. After the shapable resin material has been inserted in the inclinations, the resin is shaped to create a continuous surface. The top portion of the insert will typically need to be shaped to create a continuous occlusal surface of the tooth and insert, as discussed above. If the insert has a mounting pin (10) this will have to be removed.

35

CLAIMS

1. A pre-formed tooth insert for insertion in a prepared cavity in a tooth, wherein
 - a. said insert has at least one surface (1) that remains exposed when the insert is placed in the prepared cavity,
 - b. said insert has a contact surface (5) in continuation of the exposed surface(s) (1), which contact surface comes in contact with the inner surface of the prepared tooth cavity when the insert is placed in the cavity, said contact surface forming substantially vertical edges at the junction with said exposed surface,
 - c. each of said substantially vertical edges having an inclination or groove (2) along at least a portion of the edge such that when said insert is placed in said cavity the inclination or groove (2) is located at the junction between the exposed surface and an adjacent outer surface of the tooth, allowing insertion of a shapable resin material to form essentially a continuous surface.
2. The insert of claim 1, wherein said exposed surface comprises a surface selected from the group consisting of a proximal, mesial, proximal distal, facial and lingual surface of a tooth.
3. The insert of claim 1, which is adapted to fit a prepared proximal cavity in a tooth, such that when in place the exposed surface (1) forms part of a proximal surface of the tooth.
4. The insert of claim 1, which is adapted to fit a prepared cavity in a tooth, said cavity extending to at least two outer surfaces of said tooth, selected from the group consisting of proximal, lingual and/or facial surfaces.
5. The insert of claim 1, wherein the inclinations (2) extend from the bottom surface (11) of the insert to a height (3) such that the inclinations (2) reach substantially the occlusal embrasure.
6. The insert of claim 1 further comprising an inclination (8) along the vertical bottom edge of the exposed surface (1).
7. Then insert of claim 1 having an anchor part (13) opposite the exposed surface (1), the anchor part being wider than the center part (14) of the insert.
8. The insert of claim 1, wherein the height of the insert is in the range of about 3 mm to about 10mm.

9. The insert of claim 1, wherein the occlusal width of the insert is in the range of about 2 mm to about 10mm.
- 5 10. The insert of claim 3, wherein at least one and preferably both of the facial and lingual sides of the insert diverges from the tooth axis such that the exposed surface is wider at its occlusal end than its gingival end.
- 10 11. The insert of claim 10 wherein at least one and preferably both of the facial and lingual sides of the insert diverges from the tooth axis by an angle in the range of about 1° to about 10°, and preferably of about 2° to about 7°.
- 15 12. The insert of claim 1 wherein the insert is adapted to fit into at least one groove located on a surface of the prepared cavity, which groove lies in a substantially vertical plane.
13. The insert of claim 12, wherein the insert is adapted to fit into two grooves facing each other on opposite sides of the prepared cavity.
- 20 14. The insert of claim 1, wherein the insert is adapted to fit into a groove located on the gingival floor of said cavity.
15. The insert in claim 14, wherein the groove located on the gingival floor extends between the gingival endpoints of two opposite substantially vertical grooves.
- 25 16. A method of repairing a tooth by use of an insert of any of claims 1 to 15 comprising:
- 30 a. selecting an insert that is suitable for the size and location of decayed tooth tissue that needs repair,
- b. shaping a cavity into which the selected insert will fit,
- c. applying a dental adhesive to the inner surface of said cavity,
- d. placing said insert in said cavity,
- e. applying a shapable cement material into the inclinations or grooves located on the interfaces between said insert and the prepared cavity,
- 35 f. shaping said resin material so as to form a continuous outer surface of said tooth with insert,
- g. allowing the resin material to harden,
- h. finishing parts of the insert that extend out of the prepared cavity
- to thereby having a placed and secured insert in said tooth.
- 40




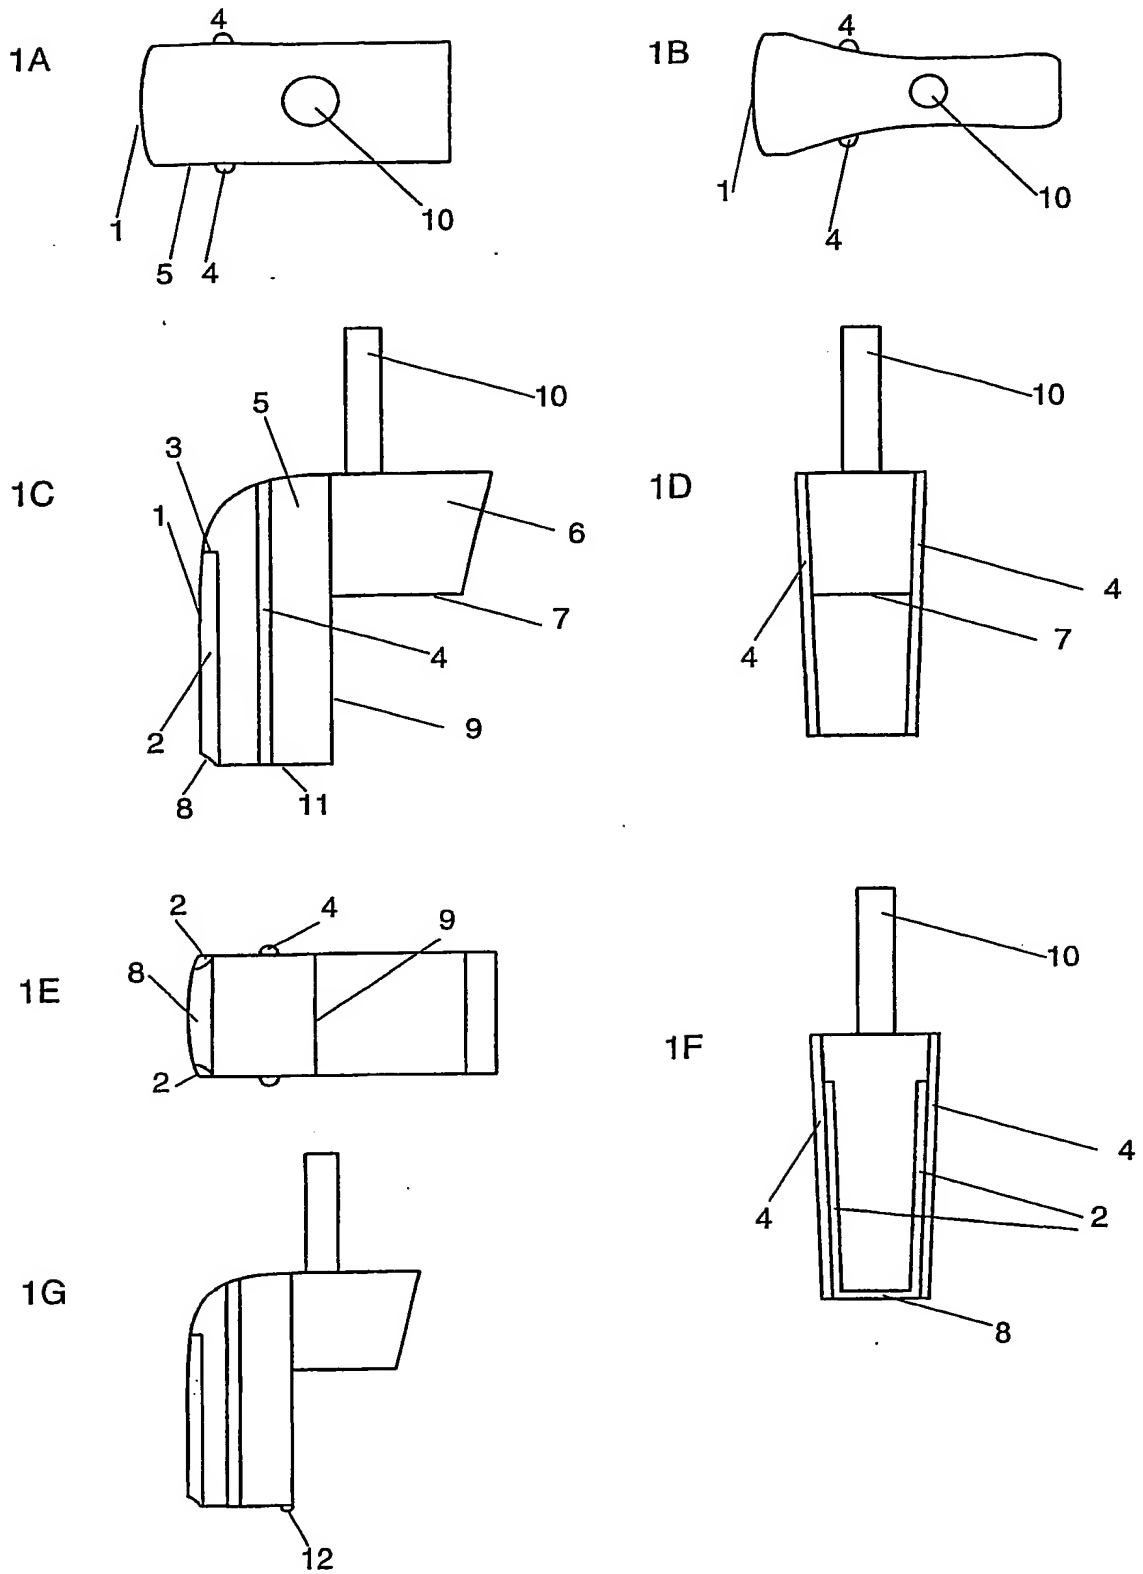


Figure 1


2A

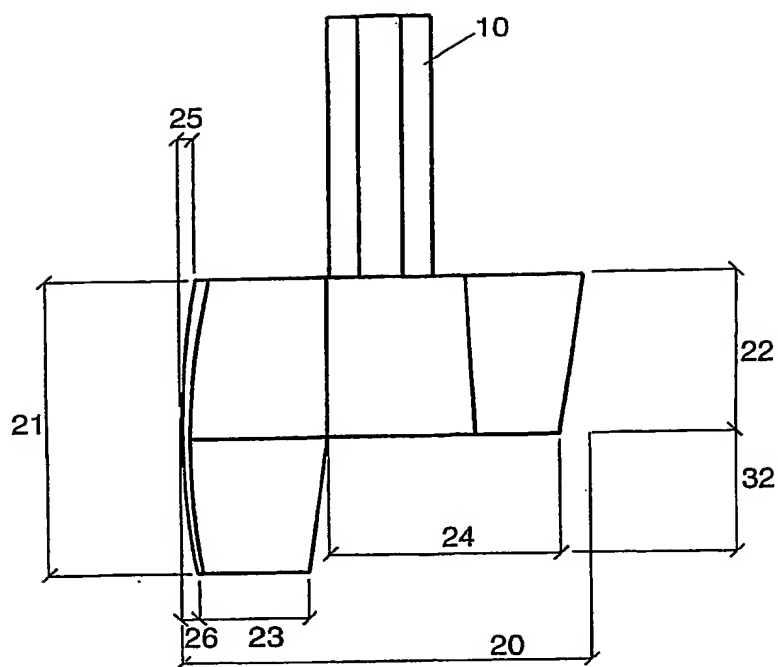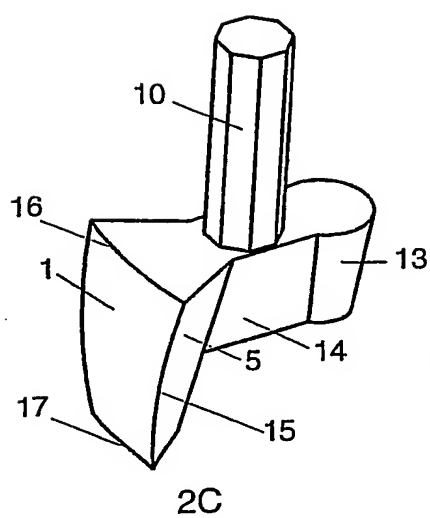


2B

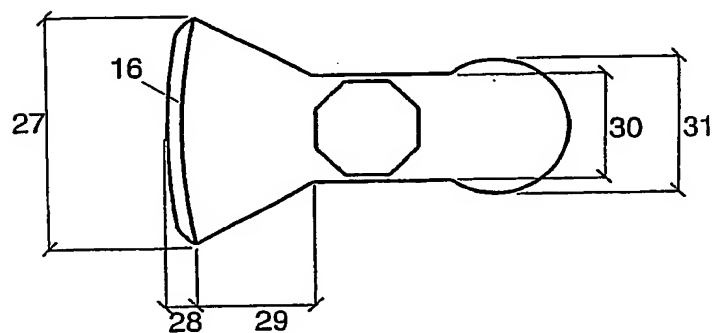

2C

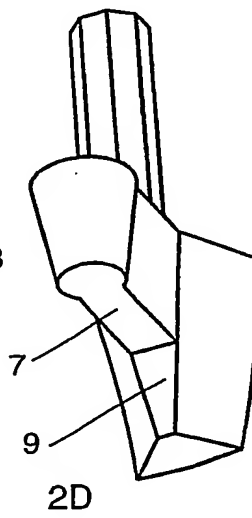

2D



2E

Figure 2

INTERNATIONAL SEARCH REPORT

International Application No
PCT/IS2004/000002

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 A61C5/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A61C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 297 05 583 U (SCHUMACHER DIETER) 5 June 1997 (1997-06-05)	1-11
Y	figures 1,4,7	12-15
A	US 5 567 156 A (GREVEN ROLF ET AL) 22 October 1996 (1996-10-22)	1-11
Y	figures 1,3 column 4, line 15 - line 60	12-15
A	WO 02/34154 A (INTUITION LTD ;JONSSON EGILL (IS); GUDMUNDSSON GEIR (IS); THORSTEI) 2 May 2002 (2002-05-02) cited in the application figure 7A	1-15
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the International filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the International filing date but later than the priority date claimed

- *T* later document published after the International filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *Z* document member of the same patent family

Date of the actual completion of the International search

24 May 2004

Date of mailing of the International search report

02/06/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Franz, V

INTERNATIONAL SEARCH REPORT

International Application No
PCT/IS2004/000002

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE 195 13 568 C (HAWELLEK RONALD DR) 9 May 1996 (1996-05-09) figure 6 claim 14	1-15
A	US 6 022 217 A (HUGO BURKHARD) 8 February 2000 (2000-02-08) figure 21 column 11, line 30 - line 35	1-15

INTERNATIONAL SEARCH REPORT

International Application No

PCT/IS2004/000002

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
DE 29705583	U	05-06-1997	DE 29705583 U1	05-06-1997
			DE 19812982 A1	01-10-1998
US 5567156	A	22-10-1996	SE 470250 B	20-12-1993
			AU 3271593 A	03-08-1993
			DE 69318697 D1	25-06-1998
			DE 69318697 T2	03-12-1998
			EP 0620721 A1	26-10-1994
			ES 2115751 T3	01-07-1998
			SE 9202428 A	08-07-1993
			WO 9313726 A1	22-07-1993
WO 0234154	A	02-05-2002	AU 1090302 A	06-05-2002
			EP 1333768 A2	13-08-2003
			WO 0234154 A2	02-05-2002
DE 19513568	C	09-05-1996	DE 19513568 C1	09-05-1996
US 6022217	A	08-02-2000	DE 4439410 A1	09-05-1996
			AT 240688 T	15-06-2003
			DE 19581254 D2	16-10-1997
			DE 59510694 D1	26-06-2003
			WO 9614024 A1	17-05-1996
			EP 0740534 A1	06-11-1996
			JP 9507775 T	12-08-1997
			JP 3388545 B2	24-03-2003
			US 6254393 B1	03-07-2001

INTERNATIONAL SEARCH REPORT

International application No.
PCT/IS2004/000002

Box II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☒ Claims Nos.: 16
because they relate to subject matter not required to be searched by this Authority, namely:
Rule 39.1(iv) PCT - Method for treatment of the human or animal body by surgery
2. ☐ Claims Nos.:
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this International application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.